





ECROU A SERRAGE RAPIDE



MATIERE ET EXECUTION :

Ref. D6303.S : semblable à la DIN 6303 en acier 5.8, tourné et bruni.

d1	Ø d2	Ø d3	Ø d4	h	k	Ref.	
						acier	INOX
M5	20	14	5,2	12	8	D6303.S.05	D6303.S.05.R
M6	24	16	6,2	14	10	D6303.S.06	D6303.S.06.R
M8	30	20	8,2	17	12	D6303.S.08	D6303.S.08.R
M10	36	28	10,3	20	14	D6303.S.10	D6303.S.10.R
M12	40	32	12,3	24	16	D6303.S.12	D6303.S.12.R



ECROU RAPIDE A BROCHE




GWN.63051



MATIERE :

Acier zingué bleu, broche soudée bout à bout.

pour vis d1	Ø d2	Ø d3	Ø d4	l1 ≈	l2	l3 ≈	Ref.
M 10	24	10,5	8	68	30	20	GWN.63051.10
M 12	26	13	9	82	36	24,5	GWN.63051.12
M 16	32	17	10	98	45	32	GWN.63051.16

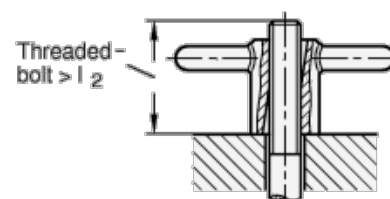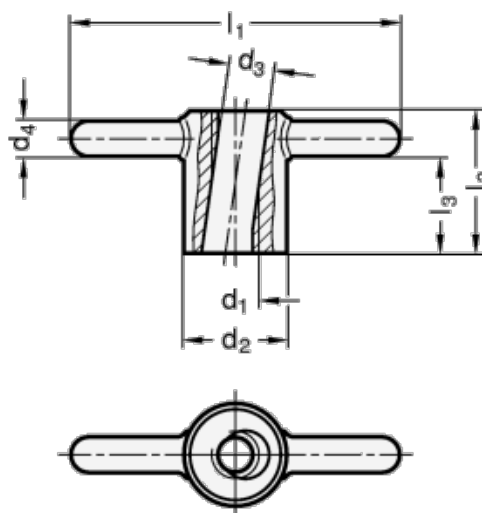

ECROU A SERRAGE RAPIDE





REMARQUE : ces écrous à serrage rapide sont spécialement utilisés lorsqu'on doit les retirer après déserrage et qu'il y a lieu par après de les remonter rapidement en position de serrage.

Ref. WWN.113 : en fonte.

Sur demande : cotes anglaises ou US (BSW ou UNC).

D	Ø D1	Ø D2	H	H1	Ref.
M6	35	16	25	16	WWN.113.201
M8	35	16	25	16	WWN.113.202
M10	40	20	25	16	WWN.113.203
M12	60	25	32	20	WWN.113.204
M14	75	32	38	25	WWN.113.205
M16	75	32	38	25	WWN.113.206



BOUTON ÉTOILE À SERRAGE RAPIDE

K.0156



MATIÈRE : Thermoplastique noir.

Douille : acier.

D	Ø D1	Ø D2	Ø D3	H	H2	Ref.
M5	25	10	5,2	16,6	9	K.0156.05
M6	32	13,5	6,2	20,6	11	K.0156.06
M8	40	13,5	8,3	24,5	13	K.0156.08
M10	50	19	10,3	31,2	17	K.0156.10
M12	63	19	12,7	39,3	21	K.0156.12

