


BUSE D'INJECTION ISO 10072 / ≈ DIN 16752

649

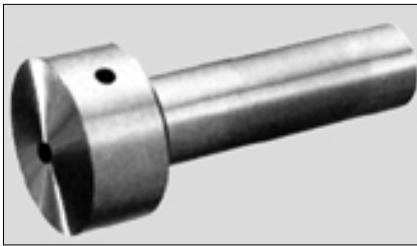


MATIERE ET EXECUTION : acier Z40 CDV 5, trempé.

DURETE : 45 - 55 HRC.

fabrications spéciales sur demande.

D	K	Ø D1	Ø D2	L						
				25	32	40	50	63	80	100
28	12	3	12	•	•					
32	16	4	16			•	•	•		
40	21	4	20			•	•	•	•	•
50	28	5,5	25				•	•	•	•

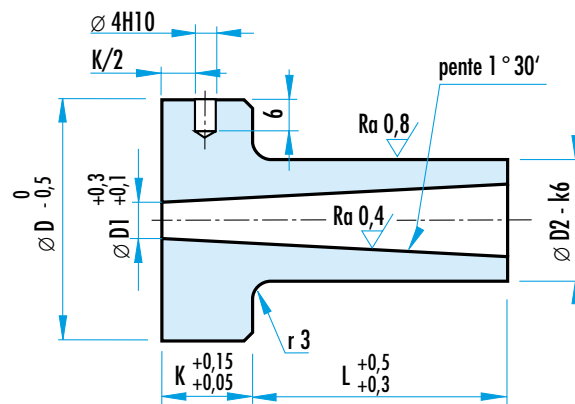

POUR LA COMMANDE :

Ref. 649 D2 = 20, D1 = 4, L = 63 = Ref. 649.20.4.063