
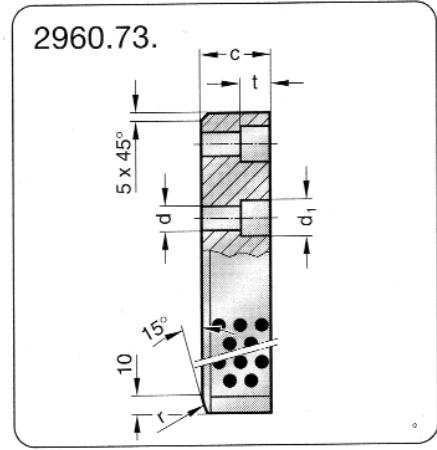
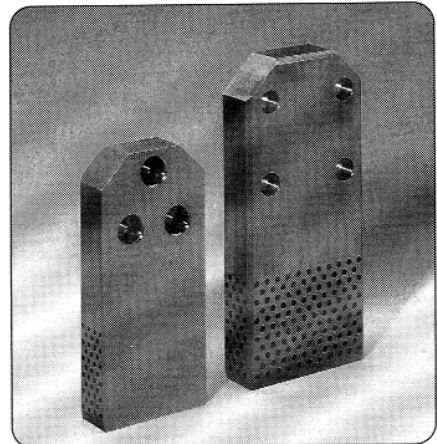


**PLAQUE DE FROTTEMENT EN ACIER
VDI 3387**

Art. 2960.73

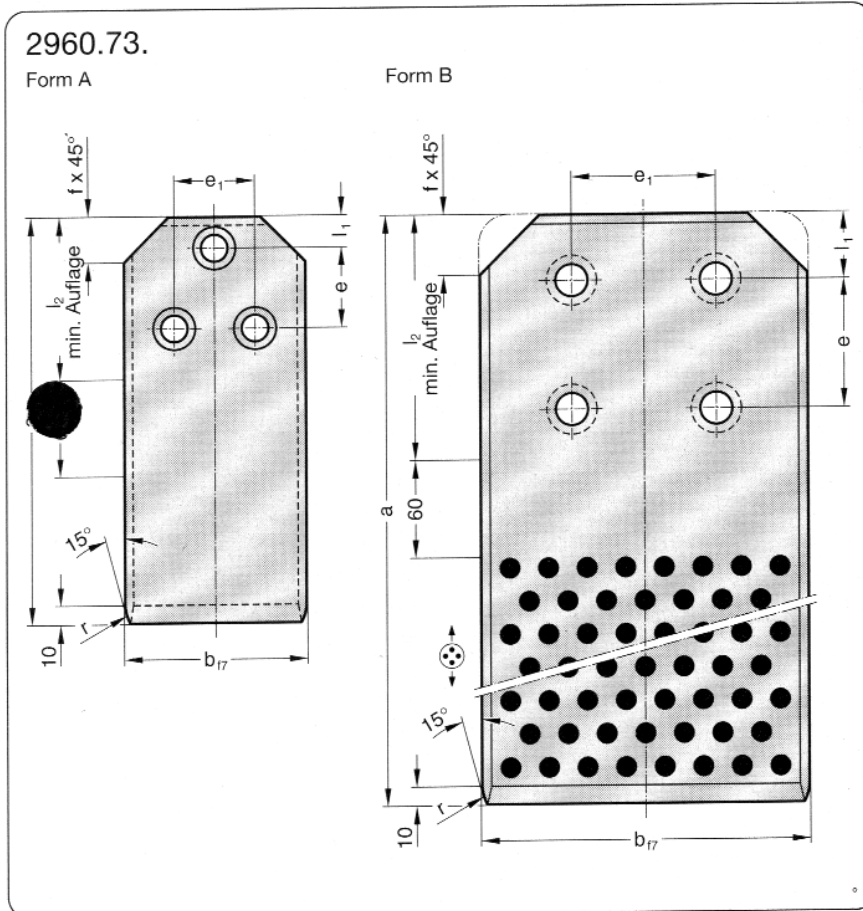

2960.73.

| Bestell-Nr. | Form | b | a | l ₁ | l ₂ | e | e ₁ | d | d ₁ | f | c | t | r | Anzahl Bohrungen |
|-----------------|------|-----|-----|----------------|----------------|-----|----------------|----|----------------|----|----|------|------|------------------|
| 2960.73.063.180 | A | 63 | 180 | 20 | 90 | 50 | 36 | 14 | 20 | 18 | 36 | 16 | 16 | 3 |
| 200 | | | 200 | | | | | | | | | | | |
| 224 | | | 224 | | | | | | | | | | | |
| 071.180 | A | 71 | 180 | | | | | | | | | | | |
| 200 | | | 200 | | | | | | | | | | | |
| 224 | | | 224 | | | | | | | | | | | |
| 090.200 | A | 90 | 200 | 20 | 100 | 50 | 50 | 18 | 26 | 28 | 45 | 21 | 25 | 3 |
| 224 | | | 224 | | | | | | | | | | | |
| 250 | | | 250 | | | | | | | | | | | |
| 112.200 | A | 112 | 200 | | | | | | | | | | | |
| 224 | | | 224 | | | | | | | | | | | |
| 250 | | | 250 | | | | | | | | | | | |
| 140.315 | B | 140 | 315 | 40 | 150 | 80 | 90 | 22 | 33 | 36 | | 25,5 | 31,5 | 4 |
| 190.400 | | 190 | 400 | | | | | | | | 56 | | | |
| 240.500 | | 240 | 500 | | 250 | 160 | 160 | 26 | 40 | | | 30,5 | | |
| 630 | | 630 | | | | | | | | | | | | |

Bestell-Beispiel:
 Führungsglasche = 2960.73.
 b = 140 mm = 140.
 a = 315 mm = 315
 Bestell-Nummer = 2960.73.140.315

Werkstoff:

Stahl, oberflächengehärtet. Gleitflächen mit eingelagertem Festschmierstoff (Festschmierstoffanteil 20-25%)

Hinweis:

Lieferung ohne Schrauben.

Befestigung:

Zylinderschrauben DIN EN ISO 4762




- 2960.73.063. M12 × 40
 - 2960.73.071. M12 × 40
 - 2960.73.090. M16 × 50
 - 2960.73.112. M16 × 50
 - 2960.73.140. M20 × 50
 - 2960.73.190. M20 × 70
 - 2960.73.240. M24 × 80
- verwenden.



Gleitrichtung
Festschmierstoff-Einsätze
(Ausschnitt)

**PLAQUE DE FROTTEMENT
VDI 3387**

Art. 2960.89

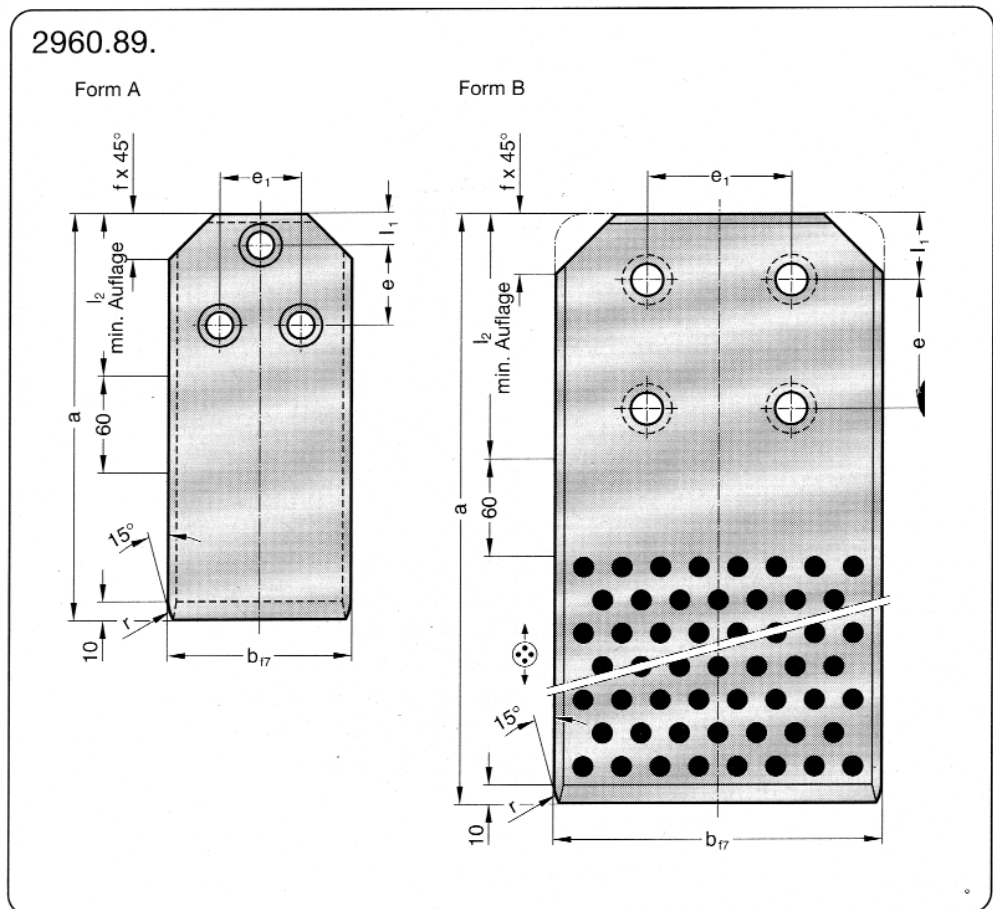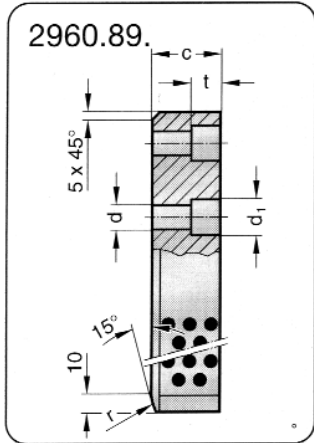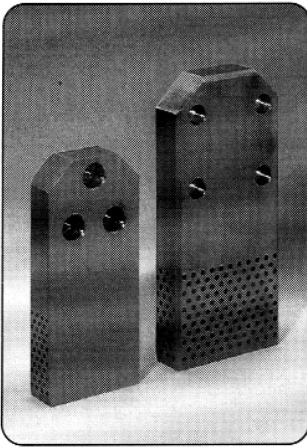

Werkstoff:

Bronze mit Festschmierstoff

Hinweis:

Lieferung ohne Schrauben.

Befestigung:

Zylinderschrauben
DIN EN ISO 4762
2960.89.063 M12×40
2960.89.071 M12×40
2960.89.090 M16×50
2960.89.112 M16×50
2960.89.140 M20×50
2960.89.190 M20×70
2960.89.240 M24×80
verwenden.



Gleitrichtung
Festschmierstoff-Einsätze
(Ausschnitt)

2960.89.

| Bestell-Nr. | Form | b | a | l ₁ | l ₂ | e | e ₁ | d | d ₁ | f | c | t | r | Anzahl Bohrungen |
|-----------------|------|-----|-----|----------------|----------------|-----|----------------|----|----------------|----|----|------|------|------------------|
| 2960.89.063.180 | A | 63 | 180 | 20 | 90 | 50 | 36 | 14 | 20 | 18 | 36 | 16 | 16 | 3 |
| 200 | | | 200 | | | | | | | | | | | |
| 224 | | | 224 | | | | | | | | | | | |
| 2960.89.071.180 | A | 71 | 180 | | | | | | | | | | | |
| 200 | | | 200 | | | | | | | | | | | |
| 224 | | | 224 | | | | | | | | | | | |
| 2960.89.090.200 | A | 90 | 200 | 20 | 100 | 50 | 50 | 18 | 26 | 28 | 45 | 21 | 25 | 3 |
| 224 | | | 224 | | | | | | | | | | | |
| 250 | | | 250 | | | | | | | | | | | |
| 2960.89.112.200 | A | 112 | 200 | | | | | | | | | | | |
| 224 | | | 224 | | | | | | | | | | | |
| 250 | | | 250 | | | | | | | | | | | |
| 2960.89.140.315 | B | 140 | 315 | 40 | 150 | 80 | 90 | 22 | 33 | 36 | 45 | 25,5 | 31,5 | 4 |
| 2960.89.190.400 | | 190 | 400 | | | | | | | | 56 | | | |
| 2960.89.240.500 | | 240 | 500 | | 250 | 160 | 160 | 26 | 40 | | | | 30,5 | |
| 630 | | | 630 | | | | | | | | | | | |

Bestell-Beispiel:

Führungslasche = 2960.89.
b = 140 mm = 140.
a = 315 mm = 315
Bestell-Nr. = 2960.89.140.315