


AANSPUITBUS ISO 10072 / ≈ DIN 16752

649

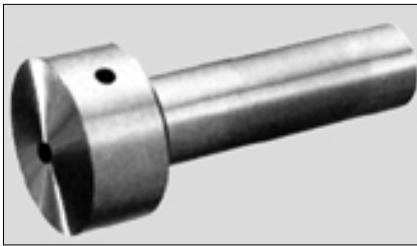


MATERIAAL : staal Z 40 CDV 5, gehard.

HARDHEID : 45 - 55 HRC.

Speciale uitvoeringen op aanvraag.

D	K	Ø D1	Ø D2	L						
				25	32	40	50	63	80	100
28	12	3	12	•	•					
32	16	4	16			•	•	•		
40	21	4	20			•	•	•	•	•
50	28	5,5	25				•	•	•	•

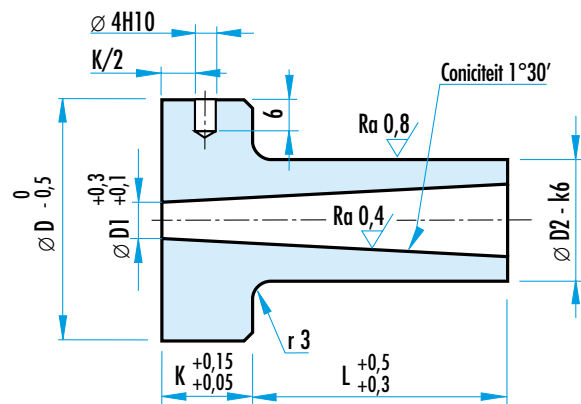

BESTELVOORBEELD :

Ref. 649 D2 = 20, D1 = 4, L = 63 = Ref. 649.20.4.063