


**CONISCHE SNELWISSELZOEKSTIFT
LICHT BELASTBAAR**

Art. 2262



2262.

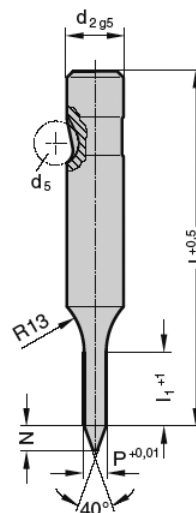

Werkstoff:

HSS
gehärtet: 62 ±2 HRC

Ausführung:

Schaft und Sucher feinstgeschliffen.

Andere Längen auf Anfrage.

2262.

d ₂	d ₅	P	l ₁	N	l											
					71	80	90	100	110	125	140	150				
10	8	5,9 – 9,9	19	8	●	●	●	●	●	●						
13	8	9,9 – 12,9	19	10	●	●	●	●	●	●	●	●	●			
16	8	12,9 – 15,9	25	15	●	●	●	●	●	●	●	●	●	●	●	
20	8	15,9 – 19,9	25	20	●	●	●	●	●	●	●	●	●	●	●	●
25	8	19,9 – 24,9	25	25	●	●	●	●	●	●	●	●	●	●	●	●
32	8	24,9 – 31,9	25	30	●	●	●	●	●	●	●	●	●	●	●	●
38	8	31,9 – 37,9	30	35	●	●	●	●	●	●	●	●	●	●	●	●

Bestell-Beispiel:


siehe Ausklappseite E 29.

**CONISCHE SNELWISSELZOEKSTIFT
ZWAAR BELASTBAAR**

Art. 2263



2263.

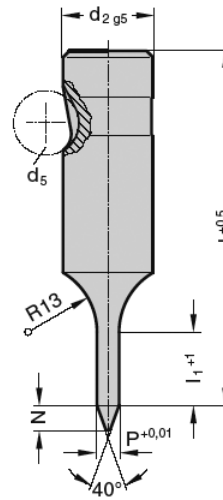

Werkstoff:

HSS
gehärtet: 62 ± 2 HRC

Ausführung:

Schaft und Sucher feinstgeschliffen.

Andere Längen auf Anfrage.

2263.

d ₂	d ₅	P _{min.}	I ₁	N	I										
					71	80	90	100	110	125	140	150			
10	10	5,9 – 9,9	19	8	●	●	●	●	●						
13	12	9,9 – 12,9	19	10	●	●	●	●	●	●	●				
16	12	12,9 – 15,9	25	15	●	●	●	●	●	●	●	●	●	●	●
20	12	15,9 – 19,9	25	20	●	●	●	●	●	●	●	●	●	●	●
25	12	19,9 – 24,9	25	25		●	●	●	●	●	●	●	●	●	●
32	12	24,9 – 31,9	25	30		●	●	●	●	●	●	●	●	●	●
40	12	31,9 – 39,9	30	40		●	●	●	●	●	●	●	●	●	●

Bestell-Beispiel:

siehe Ausklappseite E 29.

