


MAGNEETPASTILLE UIT FERRIET "HF"

MAG.SPN.HF




Klok uit verzinkt staal.
 Voor temperaturen tot 200°C.
 Optie : rubberen deksel voor Ø 50 / 63 en 80 mm.
 Ref. **MAG.SPC.RU.01 / 02 / 03.**

Ø D	L	Kracht (daN)	Ref
10	4,5	0,4	MAG.SPN.HF.010.05
13	4,5	1	MAG.SPN.HF.013.05
16	4,5	1,8	MAG.SPN.HF.016.05
20	6	3	MAG.SPN.HF.020.06
25	7	4	MAG.SPN.HF.025.07
32	7	8	MAG.SPN.HF.032.07
36	7,7	10	MAG.SPN.HF.036.08
40	8	12,5	MAG.SPN.HF.040.08
47	9	18	MAG.SPN.HF.047.09
50	10	22	MAG.SPN.HF.050.10
57	10,5	28	MAG.SPN.HF.057.11
63	14	35	MAG.SPN.HF.063.14
80	18	60	MAG.SPN.HF.080.18
100	22	90	MAG.SPN.HF.100.22
125	26	130	MAG.SPN.HF.125.26

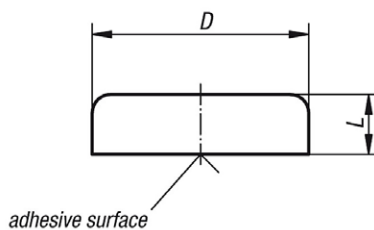

MAGNEETPASTILLE UIT FERRIET MET INKEPINGEN "HF"



MAG.SPK.HF

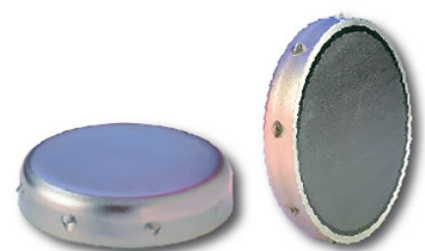

Klok uit verzinkt staal.
 Voor temperaturen tot 200°C.
 Met externe inkepingen voor het bevestigen en blokkeren door het persen, kleven, gieten.

Ø A	B	n*	D	E	Kracht (daN)	Ref
16	4,5	3	16,5 - 18	120°	1,8	MAG.SPK.HF.016.05
20	6	6	20,5 - 22	60°	3	MAG.SPK.HF.020.06
25	7	6	25,5 - 27	60°	4	MAG.SPK.HF.025.07
32	7	3	32,5 - 34	120°	8	MAG.SPK.HF.032.07
40	8	6	41 - 43	60°	12,5	MAG.SPK.HF.040.08
50	10	8	51 - 53	45°	22	MAG.SPK.HF.050.10

n* = nombre d'entailles

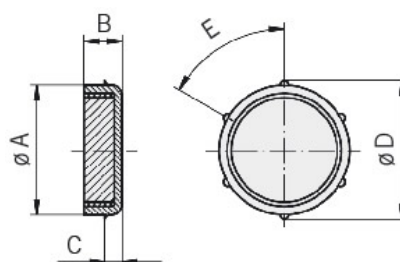



**MAGNEETPASTILLE
UIT SAMARIUM KOBALT "SC"**

MAG.SPN.SC



Klok uit verzinkt staal.
Voor temperaturen tot 250°C.

Ø D	H	Kracht (daN)	Ref
6	4,5	0,5	MAG.SPN.SC.006.05
8	4,5	1,1	MAG.SPN.SC.008.05
10	4,5	2	MAG.SPN.SC.010.05
13	4,5	4	MAG.SPN.SC.013.05
16	4,5	6	MAG.SPN.SC.016.05
20	6	9	MAG.SPN.SC.020.06
25	7	15	MAG.SPN.SC.025.07
32	7	22	MAG.SPN.SC.032.07



**MAGNEETPASTILLE
UIT NEODYMIUM "ND"**

MAG.SPN.ND

Klok uit verzinkt staal.
Voor temperaturen tot 80°C.



Ø D	H	Kracht (daN)	Ref
6	4,5	0,5	MAG.SPN.ND.006.05
8	4,5	1,3	MAG.SPN.ND.008.05
10	4,5	2,5	MAG.SPN.ND.010.05
13	4,5	6	MAG.SPN.ND.013.05
16	4,5	9,5	MAG.SPN.ND.016.05
20	6	14	MAG.SPN.ND.020.06
25	7	20	MAG.SPN.ND.025.07
32	7	35	MAG.SPN.ND.032.07

