

POSITIONEERENHEID MET DRAAIBEVEILIGING










MATERIAAL EN UITVOERING :

knop uit staal, zwart
huls uit verzinkt staal
stift uit gehard staal, zwart
flensblok uit zamak, met zwarte kunststoffen
bekleding
moer uit staal, zwart.

veerkracht :

d1	F1 -> F2 (daN)
M12 x 1,5	1,6 - 3,5
M16 x 1,5	2,5 - 7,1
M20 x 1,5	4 - 13

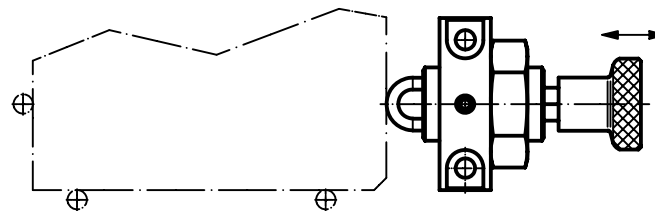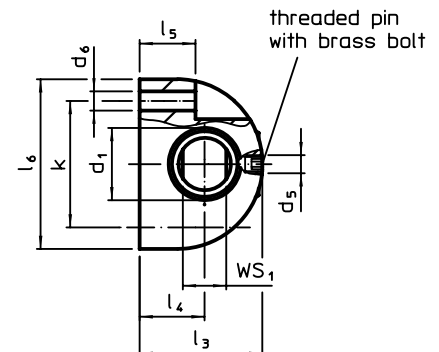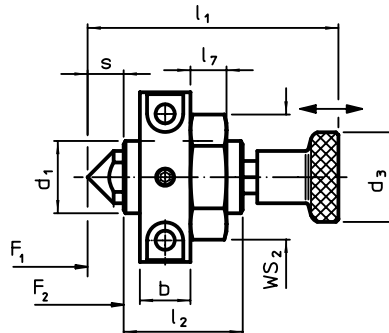

Type	d1	d2	d3	d4	d5	d6	l1	l2	l3	l4	l5 -0,2	l6	l7	t	r	b	s	k	WS1	WS2	Ref.
1	M12x1,5	9,0	21	M4	M4	4,3	46,0	19,0	26	14	11,5	35	6	8	-	12	6	25	8	19	H.23230.0510
	M16x1,5	12,0	21	M5	M5	5,3	56,0	27	34	18	15,5	47	8	10	-	14	8	35	10	24	H.23230.0512
	M20x1,5	14,5	25	M6	M5	5,3	69,5	33	34	18	15,5	47	10	12	-	14	10	35	12	30	H.23230.0514
2	M12x1,5	9,0	21	-	M4	4,3	46,0	19,0	26	14	11,5	35	6	-	-	12	6	25	8	19	H.23230.0530
	M16x1,5	12,0	21	-	M5	5,3	56,0	27	34	18	15,5	47	8	-	-	14	8	35	10	24	H.23230.0532
	M20x1,5	14,5	25	-	M5	5,3	69,5	33	34	18	15,5	47	10	-	-	14	10	35	12	30	H.23230.0534
3	M12x1,5	9,0	21	-	M4	4,3	46,0	19,0	26	14	11,5	35	6	-	4,5	12	6	25	8	19	H.23230.0550
	M16x1,5	12,0	21	-	M5	5,3	56,0	27	34	18	15,5	47	8	-	6,0	14	8	35	10	24	H.23230.0552
	M20x1,5	14,5	25	-	M5	5,3	69,5	33	34	18	15,5	47	10	-	7,2	14	10	35	12	30	H.23230.0554
4	M12x1,5	9,0	21	-	M4	4,3	46,0	19,0	26	14	11,5	35	6	-	-	12	6	25	4	19	H.23230.0570
	M16x1,5	12,0	21	-	M5	5,3	56,0	27	34	18	15,5	47	8	-	-	14	8	35	6	24	H.23230.0572
	M20x1,5	14,5	25	-	M5	5,3	69,5	33	34	18	15,5	47	10	-	-	14	10	35	8	30	H.23230.0574